

Peti-to-Care

Smart cat little box

PetiGIO



USER MANUAL

Read this user manual carefully before using the product
Images are for reference only, always refer to the actual product

EN PETI-200

CATALOGUE

- Precautions
- Product Features and Characteristics
- List of Components
- Main Technical Parameters
- How to Use
- The App
- Cleaning and Maintenance
- Common Issues and Troubleshooting
- Certificates of Conformity

I. PRECAUTIONS

This device should be placed and used indoors.

If the cat's height is below 170 mm (or the weight is below 1 kg), the device needs to be switched to manual mode (i.e., turn off the device before the cat uses it, turn it on after it has been used, and turn it off after manually cleaning it).

Turn on the device after adding cat litter and installing the waste bin.

When adding cat litter, make sure its level is between the indicated MAX and MIN lines, otherwise, the device will not work or will be ineffective.

It is recommended to use high-quality granular clumping cat litter, such as bentonite cat litter. Mineral cat litter, rice grain cat litter, tofu cat litter, and cat litter with long strips must not be used.

When this device is switched on, the motor will start automatically without warning. Keep your hands, clothes, as well as children away from the device and read the instructions before use; store the device out of reach of infants, toddlers, and people unfit to use it.

II. PRODUCT FEATURES AND CHARACTERISTICS

Intelligent sensor. The device is in standby mode when the cat is inside the litter box, and it automatically cleans up after the cat leaves.

Thanks to the anti-pinch mechanism, there is no need to worry about your cat getting caught in the litter box; the cleaning rake stops automatically when it is blocked during operation, which makes the device safe for use.

Connect to Wi-Fi and operate the device remotely through the App

Some parts can be detached for cleaning.

Lower operating noise.

III. LIST OF COMPONENTS

Main Body x 1

Power Adapter x 1

Special Waste Bag (complimentary) x 1

User Manual x 1

Certificate (included in the User Manual) x 1

Telescopic Cloth Cover (if applicable) x 1


When unboxing the product, check whether the cardboard box or other packaging is in good condition, and verify all accessories. If there is any damage or any parts are missing, contact the dealer or manufacturer in a timely manner.

IV. MAIN TECHNICAL PARAMETERS


Product Name	PETI-to-CARE Smart Cat Litter Box
Product Model	PETI-200
Power Adapter	Input AC100-240V Output DC12V/1A
Rated Power	≤ 7VA
Standby Power	≤ 0.5VA
Wi-Fi band	2.4G (does not support the 5G band)
Countdown Adjustment for 5-stage work	1 minute, 5 minutes, 10 minutes, 15 minutes, 20 minutes
Cat Litter Loading Capacity	5L
Waste Bin Capacity	5L
Operating Noise	≤45dB (A-weighted)
Electrical Classification	Class II equipment
Device Size	738 mm x 460 mm x 250 mm
Net Weight	6.4 kg
Normal Working Environment	Ambient temperature 5-40°C, relative humidity ≤93%, and no condensation phenomenon.
Storage and Transportation Environment	Ambient temperature -20-60°C, relative humidity ≤93%, and no condensation phenomenon.
Implementation Standard	Implementation Standard: IEC60335-1

V. HOW TO USE


Product Overview

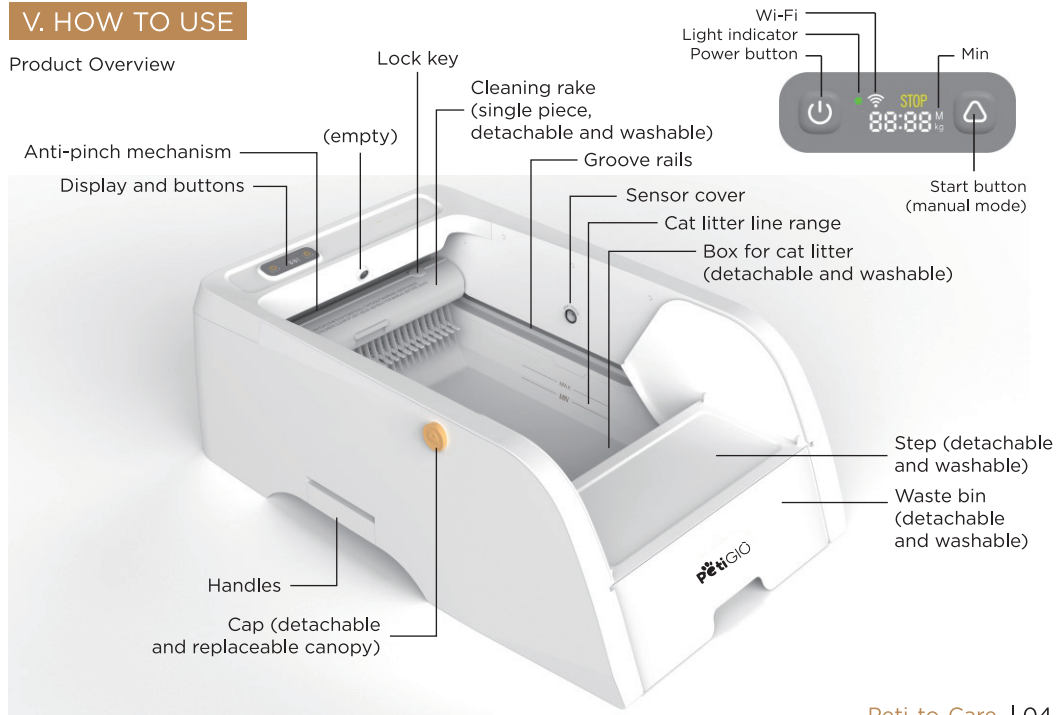


- 1 Place the device on a flat surface, pull out the waste bin and insert the waste bag. Put the waste bin back in place.

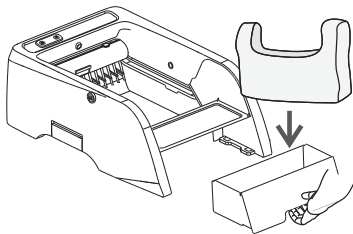


- 2 Add around 3-5 liters of cat litter (granular cat litter).

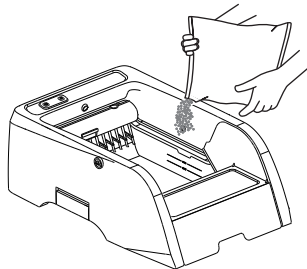


- 3 Even out the cat litter (you can disassemble the cleaning rake, and use the cleaning rake to scrape the cat litter), and make sure to never exceed the MAX line.

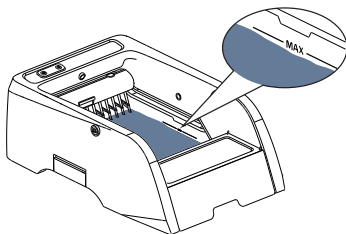


- 4 After you connect the power adapter, the device will run a self-check and go into standby mode.




- 5 When the cat leaves after relieving itself, the device automatically starts a countdown.

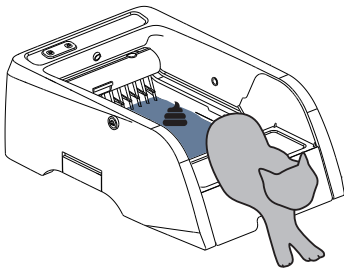


- 6 When the countdown finishes (factory setting: 1 minute), the cleaning rake will be activated.

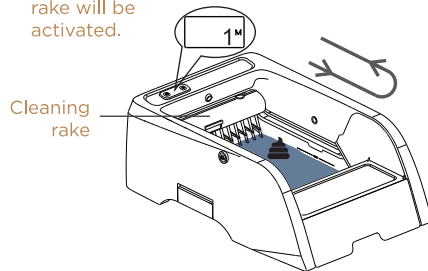

- 7 The cleaning rake shovels the clumped cat litter into the waste bin, and then returns to its initial position, in order to finish the cleanup.

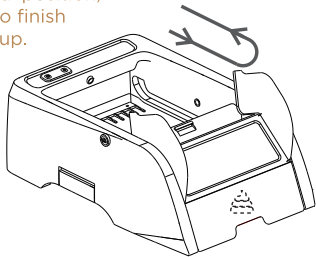


- 8 When the waste bin is full, replace the waste bag.

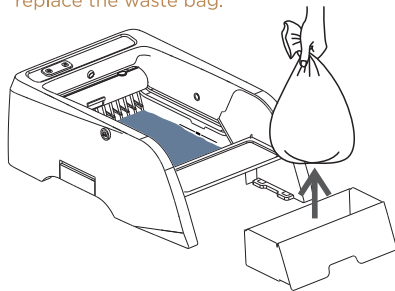


Disassembling the litter box

As shown below, the device can be lifted by pulling the left and right handles; moreover, it is possible to remove the box for cat litter.

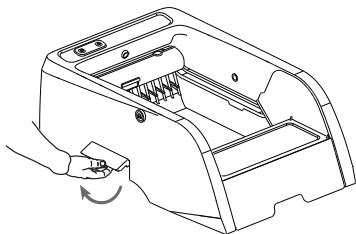


Removing the step

As shown below, the step can be removed by rotating it to a certain angle.



Disassembling the cleaning rake

When the device is in standby mode, press the start button to let the machine rake out the litter, then press pause, as shown below; Press the two locks with your fingers to eject the cleaning rake.

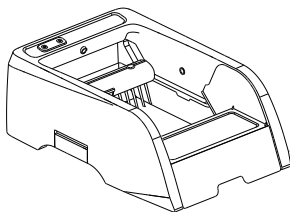

Other Notes

One-click cleanup (power button) When the device is in standby mode, press the start button once for the device to activate, and then press pause. In standby mode, press and hold the start button for 5 seconds to enter the countdown time selection (1 minute, 5 minutes, 10 minutes, 15 minutes, 20 minutes) - the device will be set to a given countdown time after it is left on for 3 seconds.

Wi-Fi pairing (Connect with mobile phone). When the device is turned on, press and hold the power button for 5 seconds to enter the Wi-Fi pairing mode.

STOP

When the machine rake is in use, the display is not lit up.

VI. THE APP

The machine should be placed within the effective distance of the Wi-Fi router, and the machine is then in standby mode;



When the mobile phone is connected to Wi-Fi (and Bluetooth is turned on), scan the QR code on the product label (or the back cover of the user manual) and install the App;

Open the App, click "Add Device" on the home page, then press and hold the button on the device (see product overview for details) for 5 seconds, until the Wi-Fi icon starts flashing. Release the button after hearing the "boom" sound, it will automatically search for the device;



VI. THE APP

4. Search for "Smart Cat Litter Box Standard Edition" and click "Add". Enter the Wi-Fi password and click "Next".

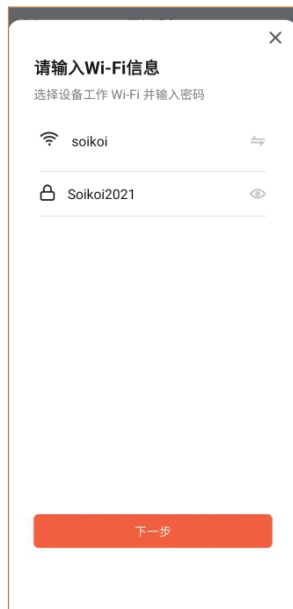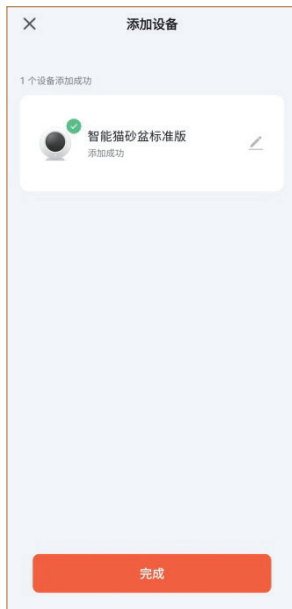



Description of the functionalities

Smart Cat Litter Box Standard Edition: you can click the icon in the top right corner to edit the name;

Number of toilet visits: real-time feedback on the number of toilet visits throughout the day (24 hours) (including the number of cleanups);

Excretion duration: shows the duration of the most recent visit;

Single-key cleaning: click to start the cleaning when the machine is in standby mode, and then click pause;

Timed hibernation: Click to add a timer for the device stop operation for a set amount of time;

Health management: Click to see the number of toilet visits throughout the day (24 hours), the duration of each toilet visit and other data;

Delay Cleanup Settings: Click to set the countdown time for cleanups.

VII. CLEANING AND MAINTENANCE

Clean the enclosure and surfaces

The transparent cover of the sensor should be wiped frequently to avoid dust and dirt covering the sensor head, which could prevent it from working, as the groove rail could be blocked by the waste. Exterior of the device: When the case and other surfaces need to be cleaned, unplug the power adapter and wipe them with a clean, soft, slightly damp cloth soaked in detergent and make sure the liquid does not seep into the inside of the machine.

*Note: There is a circuit board inside the product, so the liquid must not go inside the device.

Washable parts (see product diagram)

In order to keep the environment and the device clean, the waste bin, the step, box for cat litter and cleaning rakes should be dismantled and washed frequently, and should be wiped or dried before being put back inside the device.



VIII. COMMON ISSUES AND TROUBLESHOOTING

No.	Symptoms	Cause Analysis	Exclusion Method
1	Not working	The power indicator is not lit up. The power indicator is on. Failure.	Plug in the power adapter. If the transparent cover of the sensor is blocked, clean the sensor cover or remove the obstruction. Consult customer service.
2	Display "EO"	The motor torque load is exceeded.	There is too much cat litter, please remove the excess cat litter that blocks the machine rake. Check whether the groove rail and box for cat litter are blocked by a cluster, after removing the obstruction, pull out the adapter, and plug it back in after the display screen is off.
3	No reset, round turn or stop	The anti-pinch mechanism is blocked. Failure.	Turn the machine upside down and clean up the waste. Consult customer service.
4	Abnormal noise during use	There is waste on the groove rails.	Clean up the waste on the groove rails.
5	The box for cat litter, inner wall and cleaning rake are blocked	Cat litter does not clump easily. The countdown time may be too short.	Replace with good quality cat litter, which can clump faster and better. Adjust the countdown time.

STRESS-FREE PET OWNERSHIP



Scan QR code
to visit our website



Produced in China for **PetiGIO** sp. z o.o.
Ostródzka street 74H, 03-289 Warsaw, Poland

www.petigio.com